



Flat Bar Barrelrack

(225L)

- Can be stacked up to 6 tiers high.
- Welded with high fusion thread.
- Simple and safe movement, avoiding occupational hazards.
- May be used with automatic washers systems of barrels.

◀ TECHNICAL CHARACTERISTICS

Exterior dimensions (length x width x height)


1395 x 610 x 350 mm.

Weight

25 Kg/Unit.

Others


Starts from the ground

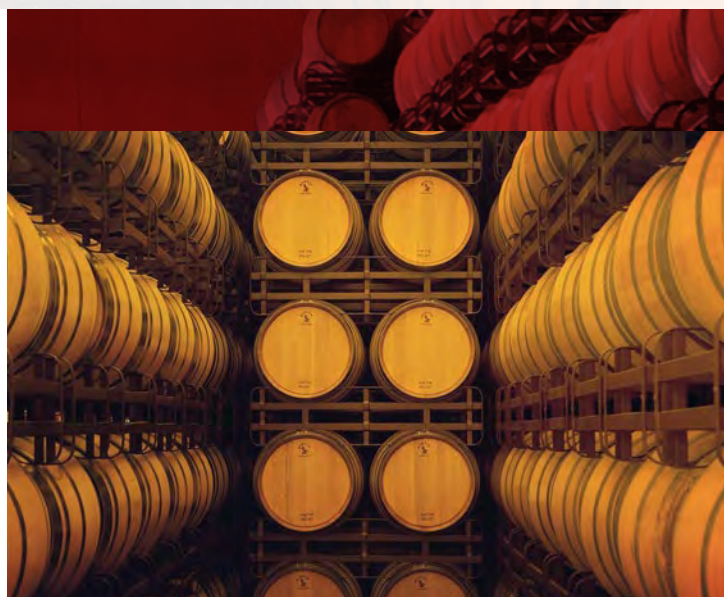

- Manufactured in high-quality steel and welded with high-fusion wire.
- Epoxy Paint in any colour from the RAL colour chart.
- Galvanized or bichromated.
- Degreased, phosphate-coated and mineralized water treatment.
- 300-400 hrs resistance in a saline fog.




 Curved strip with 10° slope to favor support and stacking stability.

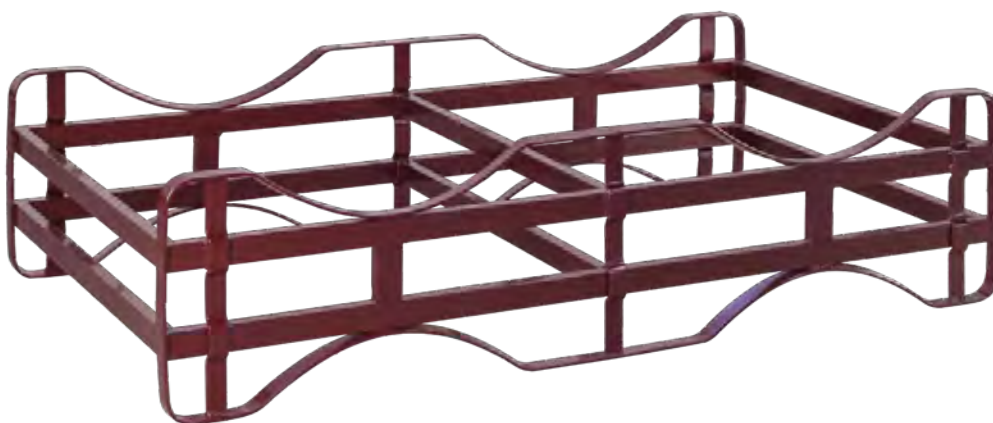

 Robust and anticorrosive in humid environments.



 Strip with the shape of the tube for greater support.

